

## Cycolac\* Resin S703

### Europe-Africa-Middle East: COMMERCIAL

Cycolac S703 is a super high flow ABS developed for thin wall injection moulding and injection / compression moulding applications.

| TYPICAL PROPERTIES <sup>1</sup>             | TYPICAL VALUE | UNIT              | STANDARD     |
|---|---------------|-------------------|--------------|
| <b>MECHANICAL</b>                           |               |                   |              |
| Taber Abrasion, CS-17, 1 kg                 | 90            | mg/1000cy         | SABIC Method |
| Tensile Stress, yield, 5 mm/min             | 40            | MPa               | ISO 527      |
| Tensile Stress, break, 5 mm/min             | 35            | MPa               | ISO 527      |
| Tensile Stress, yield, 50 mm/min            | 40            | MPa               | ISO 527      |
| Tensile Stress, break, 50 mm/min            | 35            | MPa               | ISO 527      |
| Tensile Strain, yield, 5 mm/min             | 2             | %                 | ISO 527      |
| Tensile Strain, break, 5 mm/min             | 20            | %                 | ISO 527      |
| Tensile Strain, yield, 50 mm/min            | 2             | %                 | ISO 527      |
| Tensile Strain, break, 50 mm/min            | 25            | %                 | ISO 527      |
| Tensile Modulus, 1 mm/min                   | 2500          | MPa               | ISO 527      |
| Flexural Stress, yield, 2 mm/min            | 68            | MPa               | ISO 178      |
| Flexural Modulus, 2 mm/min                  | 2500          | MPa               | ISO 178      |
| Hardness, H358/30                           | 101           | MPa               | ISO 2039-1   |
| Hardness, Rockwell R                        | 115           | -                 | ISO 2039-2   |
| <b>IMPACT</b>                               |               |                   |              |
| Izod Impact, notched 80*10*4 +23°C          | 8             | kJ/m <sup>2</sup> | ISO 180/1A   |
| Izod Impact, notched 80*10*4 -30°C          | 5             | kJ/m <sup>2</sup> | ISO 180/1A   |
| Charpy 23°C, V-notch Edgew 80*10*4 sp=62mm  | 8             | kJ/m <sup>2</sup> | ISO 179/1eA  |
| Charpy -30°C, V-notch Edgew 80*10*4 sp=62mm | 4             | kJ/m <sup>2</sup> | ISO 179/1eA  |
| Charpy Impact, notched, -30°C               | 6             | kJ/m <sup>2</sup> | ISO 179/2C   |
| <b>THERMAL</b>                              |               |                   |              |
| Thermal Conductivity                        | 0.2           | W/m-°C            | ISO 8302     |
| CTE, 23°C to 60°C, flow                     | 8.E-05        | 1/°C              | ISO 11359-2  |

<sup>1</sup> Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 230C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

<sup>2</sup> Only typical data for material selection purpose. Not to be used for part or tool design.  
<sup>3</sup> This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
<sup>4</sup> Own measurement according to UL.  
<sup>5</sup> Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布, 我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

## Cycolac\* Resin S703

### Europe-Africa-Middle East: COMMERCIAL

| TYPICAL PROPERTIES <sup>1</sup>             | TYPICAL VALUE | UNIT                    | STANDARD       |
|---|---------------|-------------------------|----------------|
| <b>THERMAL</b>                              |               |                         |                |
| CTE, 23°C to 60°C, xflow                    | 8.E-05        | 1/°C                    | ISO 11359-2    |
| Ball Pressure Test, 75°C +/- 2°C            | PASSES        | -                       | IEC 60695-10-2 |
| Vicat Softening Temp, Rate B/50             | 97            | °C                      | ISO 306        |
| Vicat Softening Temp, Rate B/120            | 100           | °C                      | ISO 306        |
| HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm     | 89            | °C                      | ISO 75/Be      |
| HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm     | 78            | °C                      | ISO 75/Ae      |
| Relative Temp Index, Elec                   | 60            | °C                      | UL 746B        |
| Relative Temp Index, Mech w/impact          | 60            | °C                      | UL 746B        |
| Relative Temp Index, Mech w/o impact        | 60            | °C                      | UL 746B        |
| <b>PHYSICAL</b>                             |               |                         |                |
| Mold Shrinkage on Tensile Bar, flow (2) (5) | 0.5 - 0.7     | %                       | SABIC Method   |
| Density                                     | 1.05          | g/cm <sup>3</sup>       | ISO 1183       |
| Water Absorption, (23°C/sat)                | 1             | %                       | ISO 62         |
| Moisture Absorption (23°C / 50% RH)         | 0.2           | %                       | ISO 62         |
| Melt Flow Rate, 220°C/10.0 kg               | 80            | g/10 min                | ISO 1133       |
| Melt Volume Rate, MVR at 220°C/5.0 kg       | 25            | cm <sup>3</sup> /10 min | ISO 1133       |
| Melt Volume Rate, MVR at 220°C/10.0 kg      | 80            | cm <sup>3</sup> /10 min | ISO 1133       |
| <b>ELECTRICAL</b>                           |               |                         |                |
| Volume Resistivity                          | >1.E+15       | Ohm-cm                  | IEC 60093      |
| Surface Resistivity, ROA                    | >1.E+15       | Ohm                     | IEC 60093      |
| Dielectric Strength, in oil, 0.8 mm         | 35            | kV/mm                   | IEC 60243-1    |
| Dielectric Strength, in oil, 1.6 mm         | 26            | kV/mm                   | IEC 60243-1    |
| Dielectric Strength, in oil, 3.2 mm         | 18            | kV/mm                   | IEC 60243-1    |
| Relative Permittivity, 50/60 Hz             | 2.7           | -                       | IEC 60250      |
| Relative Permittivity, 1 MHz                | 2.6           | -                       | IEC 60250      |

<sup>1</sup> Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

<sup>2</sup> Only typical data for material selection purpose. Not to be used for part or tool design.  
<sup>3</sup> This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
<sup>4</sup> Own measurement according to UL.  
<sup>5</sup> Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布，我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

## Cycolac\* Resin S703

### Europe-Africa-Middle East: COMMERCIAL

| TYPICAL PROPERTIES <sup>1</sup>               | TYPICAL VALUE | UNIT | STANDARD       |
|---|---------------|------|----------------|
| <b>ELECTRICAL</b>                             |               |      |                |
| Dissipation Factor, 50/60 Hz                  | 0.004         | -    | IEC 60250      |
| Dissipation Factor, 1 MHz                     | 0.008         | -    | IEC 60250      |
| Comparative Tracking Index                    | 600           | V    | IEC 60112      |
| <b>FLAME CHARACTERISTICS</b>                  |               |      |                |
| UL Recognized, 94HB Flame Class Rating (3)    | 1.5           | mm   | UL 94          |
| Glow Wire Flammability Index 650°C, passes at | 1             | mm   | IEC 60695-2-12 |

<sup>1</sup> Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

<sup>2</sup> Only typical data for material selection purpose. Not to be used for part or tool design.  
<sup>3</sup> This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
<sup>4</sup> Own measurement according to UL.  
<sup>5</sup> Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布, 我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

## Cycolac\* Resin S703

### Europe-Africa-Middle East: COMMERCIAL

| PROCESSING PARAMETERS       | TYPICAL VALUE | UNIT |
|-----------------------------|---------------|------|
| <b>Injection Molding</b>    |               |      |
| Drying Temperature          | 85 - 95       | °C   |
| Drying Time                 | 2 - 4         | hrs  |
| Maximum Moisture Content    | 0.02          | %    |
| Melt Temperature            | 250 - 270     | °C   |
| Nozzle Temperature          | 240 - 260     | °C   |
| Front - Zone 3 Temperature  | 245 - 265     | °C   |
| Middle - Zone 2 Temperature | 240 - 260     | °C   |
| Rear - Zone 1 Temperature   | 230 - 250     | °C   |
| Hopper Temperature          | 60 - 80       | °C   |
| Mold Temperature            | 65 - 80       | °C   |

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 23°C/50% relative humidity.  
All properties, except the melt volume rate are measured on injection moulded samples.  
All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布，我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！

**Cycolac\* Resin S703**

**Europe-Africa-Middle East: COMMERCIAL**


**CALCULATED FLOW LENGTH INDICATION**

**Moldflow® Radial Flow Analysis**

**Cycolac\* S703**

**Melt Temperature : 240°C**

**Mold Temperature : 60°C**

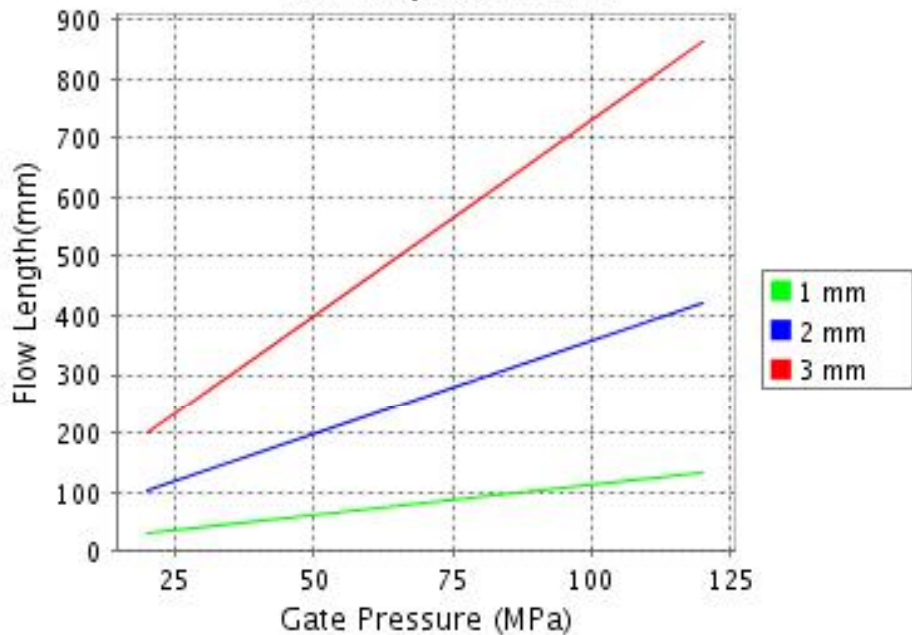

**Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.**

**® Moldflow is a registered trademark of the Moldflow Corporation.**

1) Typical values only. Variations within normal tolerances are possible for various colours. All values are measured at least after 48 hours storage at 230C/50% relative humidity. All properties, except the melt volume rate are measured on injection moulded samples. All samples are prepared according to ISO 294.

2) Only typical data for material selection purpose. Not to be used for part or tool design.  
3) This rating is not intended to reflect hazards presented this or any other material under actual fire conditions.  
4) Own measurement according to UL.  
5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

Dongguan Yi-Ming Plastic Chemical Co., Ltd.

如需要更多物性资料请查阅 [www.kedisujiao.com](http://www.kedisujiao.com)

备注：以上原料物性数据由厂家发布, 我公司仅提供参考！数据如有变动，请联系原料生产厂家获知。我公司不承担任何法律责任！